
700 SERIES

SPLASHBACK BENCH 700mm DEEP



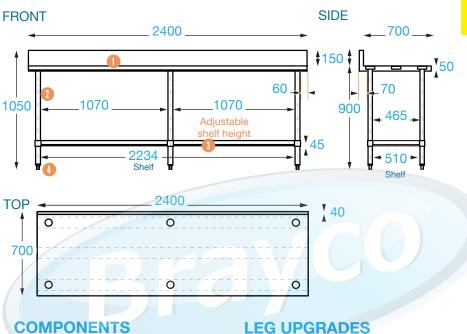

- Splashback 150 mm (high), 40 mm (deep)
- Legs Ø 42 mm
- Undershelf 1.2 mm (adjustable height)
- Adjustable feet Feet adjust up to 18 mm
- These products are compliant with all applicable Australian health department regulations.

 - It is important that your stainless steel is kept clean to extend the lifetime of the product.

BENCH Overall Dimensions: 2400 (w) x 700 (d) x 900 mm (h) Splashback Height: 150 mm

SPLASHBACK

Loading Capacity:

Top: 380 kg, Undershelf: 100 kg

Shipping Dimensions:

Bench: 2430 (w) x 720 (d) x 260 mm (h)

Shipping Weight: 78 kg

Material:

Top: 1.2 mm 304 stainless steel Undershelf: 1.2 mm galvanised steel Legs: 410 grade 42 mm diameter stainless steel

PRODUCT CODE: 24070SP

Brayco Stainless Steel is made from 95% recycled materials

FEATURES AND BENEFITS

- Adjustable Height Undershelf.
- · High Grade Stainless Steel.
- Supplied Flat Pack: Simple assembly required.
- Construction: Our units are fully stainless steel with round legs.
- Adjustable Feet: Supplied attached to leg. See additional items below for upgrade options.

ADDITIONAL ITEMS

- 430 Grade Stainless Undershelf: For extremely salty or chemical conditions.
- · Overshelves: 2 tier overshelves sit on top of bench.
- · Leg Brace Rail Kit: Remove the undershelf and add a rail kit for extra strength.
- Leg attachments: Enclose your bench by attaching panels.
- Splashback Extension: Convert your bench to a corner unit. Code: CSB700
- · Lockable Drawers: Add a unit with 1 or 2 lockable drawers.
- Extra shelves available



Brisbane • Sydney • Melbourne • Hobart • Adelaide • Perth • Auckland For more info please contact your nearest Brayco Branch 1300 272 926 | brayco.com.au

· 201 Grade Stainless Legs & Feet:

For extremely salty or chemical

Lockable Castors: For extremely

410 Grade Stainless Steel Legs &

201 Grade Stainless Steel Legs &

salty or chemical conditions.

410 Grade Stainless Legs &

• 201 Grade Stainless Legs &

Adjustable up to 18 mm.

Adjustable up to 20 mm.

Lockable Castors

Screw Down Feet:

Screw Down Feet:

conditions. Feet adjust up to 38 mm.